

CHAMBERLAIN

merlin®

more than magic

# Linear Swing Gate Opener



### 3 channel mini-transmitter Part No. C945

Controls up to three different doors or gates. Fits easily in your pocket or on a key chain. Master Kit contains 2 x C945.



### Wireless keypad Part No. C840

Mounts on the outside wall and enables you to open your gate when you enter a 4 digit security code. Standard inclusion.



### The Protector System™ safety beam sensors Part No. 771ANZ

Incorporates safety beam sensors that detect and stop the gate closing before impact. This system is strongly recommended for added safety. IP44 rated for outdoor use. Standard inclusion.



Note: Does not include wires or brackets.



### Evercharge™ battery back up Part No. MGB121

Maintenance free re-chargeable batteries. Opens the gate when mains power fails or stores energy from the solar panel. Standard inclusion.



### Vehicle exit sensor Part No. 921GA

No need to dig up the driveway. Allows handsfree automated vehicle exit. Detects moving cars within a 5m radius. May be buried in the garden or fastened to a timber or metallic post. Suits all Merlin Professional gate controllers. Includes 15m of cable. No programming required. Simple 4 wire connection. Optional Accessory.



### Solar panel Part No. SOLPNL-10W12V

10 Watt Solar Panel. Wires directly into CB12ANZ control box (No regulator required). Includes mounting bracket and hardware. Optional Accessory.

## Key features

### Long-lasting protection and durability

High impact UV resistant nylon housing with a powder coated steel tube. Moisture and insect resistant coated PCB.

### Robust maintenance-free screw drive

Minimises maintenance by enclosing the gate drive mechanism.

### Automatic variable closing settings

Setting allows delayed automatic closure for dual leaf interlocking gate.

### Adjustable force setting

Allows you to tailor the gate's force to environmental conditions.

### Hold-open mode

The gate can be held open electronically until the reset button is pressed.

### Automatic safety stop using infrared safety sensors

The low energy automatic stopping system reduces the risk of damage to people and property by stopping the gate when The Protector System™ beam is broken.

### Solar compatible

Suits Chamberlain's easy to install SOLPNL10W12V solar panel.

### Warranty



The MGL400 and MGL300 feature a 2 year warranty

## ACCESSORIES INCLUDED

- Two 3 channel C945 transmitters
- Wireless keypad entry C840
- Infrared safety sensors
- Battery back up

## OPTIONAL ACCESSORIES

- Fingerprint keyless entry pad
- Wireless wall button
- 3 or 4 channel mini-transmitters
- Single channel visor mounted transmitter
- Flashing safety light
- Solar panel
- Electric locking

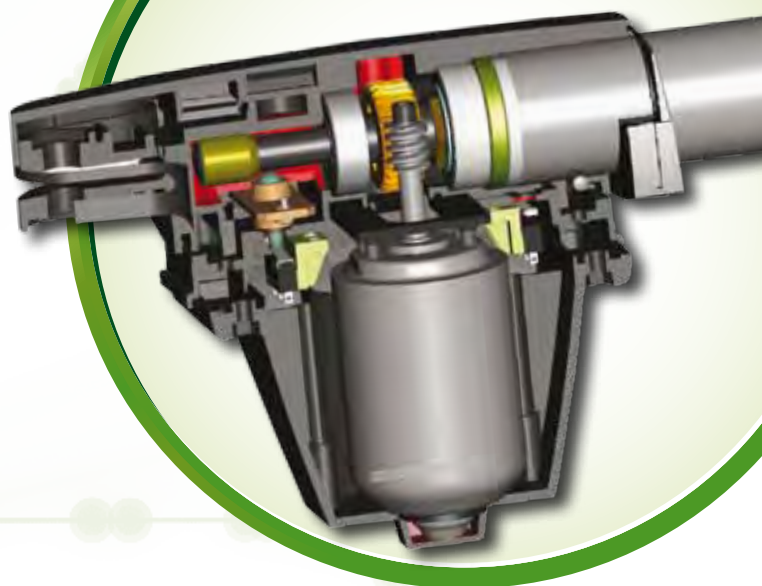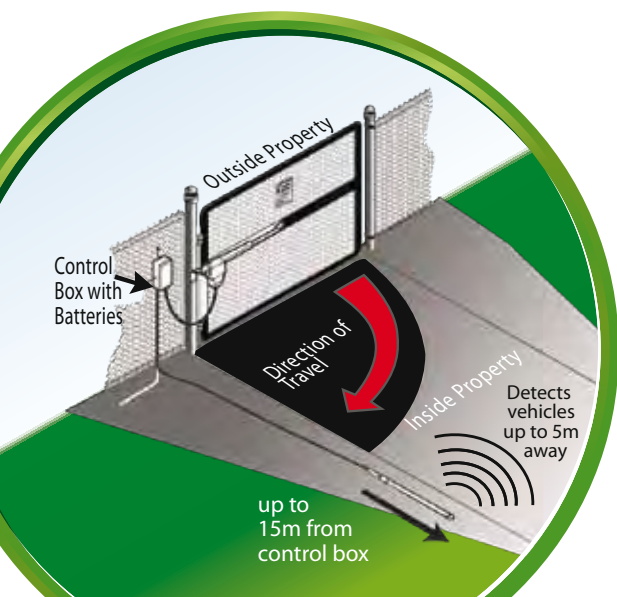

Max gate wing width	Column width	Rated gate weight	Pulling force	Model number	Drive system
3m	180mm	250kg	250N	MGL300	Linear
4m	210mm	250kg	250N	MGL400	Linear

## SPECIFICATIONS MGL300

- 12V DC operation
- Input voltage: 240VAC
- Maximum gate wing width: 3m
- Rated gate wing weight: 250kg
- Minimum column width: 180mm
- Pulling force: 250N
- IP rating: 44
- Band 433.92MHz AM radio high security rolling code with peak detect

## SPECIFICATIONS MGL400

- 12V DC operation
- Input voltage: 240VAC
- Maximum gate wing width: 4m
- Rated gate wing weight: 250kg
- Minimum column width: 210mm
- Pulling force: 250N
- IP rating: 44
- Band 433.92MHz AM radio high security rolling code with peak detect

Specifications subject to change without notification.



Chamberlain ANZ – Australia: T 1800 638 234 F 1800 888 121  
 New Zealand: T 0800 653 667 F 0800 653 663  
 E sales@chamberlainanz.com W chamberlainanz.com

© 2010 The Chamberlain Group, Inc. ® Registered Trade Marks of The Chamberlain Group, Inc. ™ Trade Marks of Chamberlain Group, Inc.

CHAMBERLAIN  
**merlin**  
 more than magic